# Custom Built by ARNCO

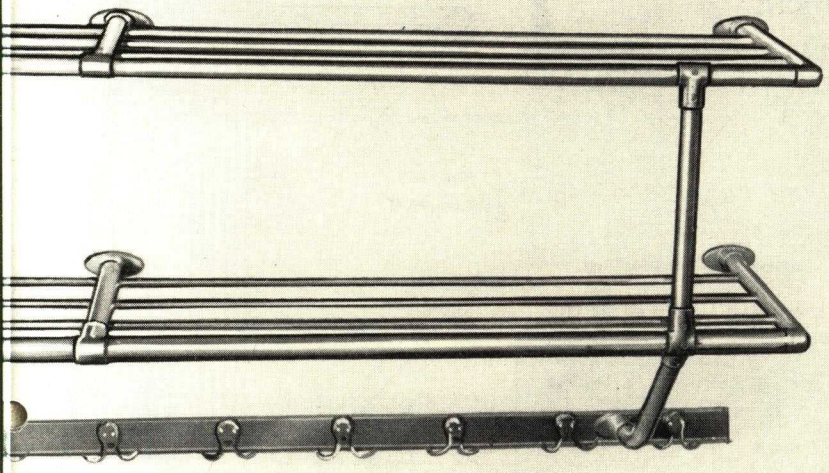

DOUBLE SHELF COAT AND HAT RACK
STYLE #102

ADDITIONAL COAT ROD FOR
STYLES No. 100, 101 & 102

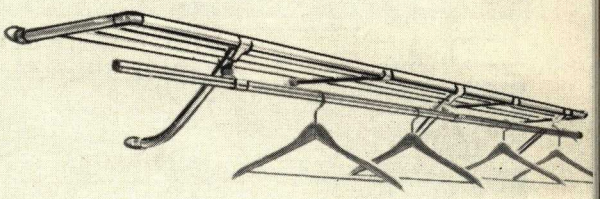

ADJUSTABLE DOUBLE PRONG SNAP-ON HOOKS
TO PROVIDE ADDITIONAL CAPACITY,
OR USED IN PLACE OF HOOK STRIPS

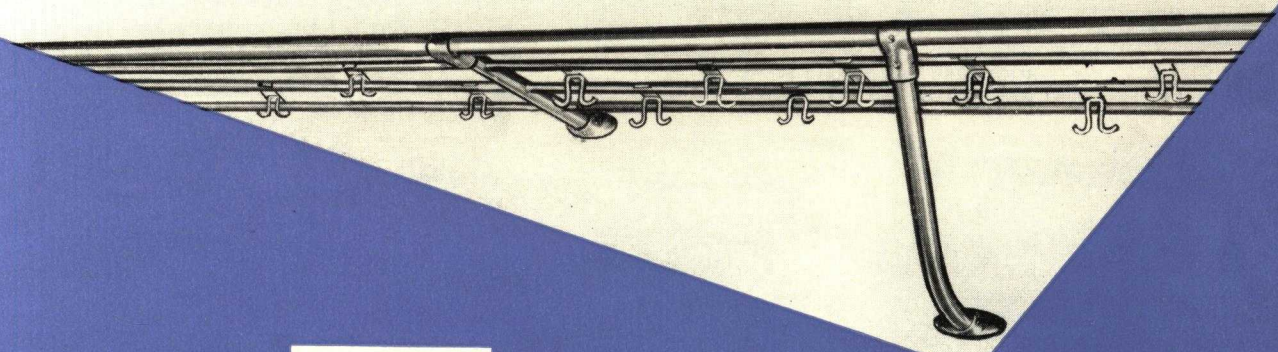

ARNCO

## ALUMINUM
## Coat and Hat Rack

alumilited aluminum

FOR SCHOOLS, HOSPITALS, INSTITUTIONS

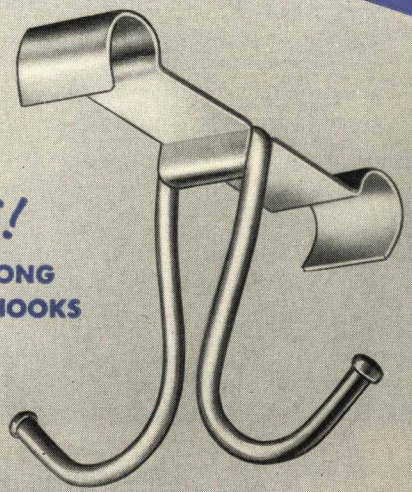

NEW!

DOUBLE PRONG
"SNAP-ON" HOOKS

**A. R. NELSON CO., INC.** 38-35 CRESCENT ST., LONG ISLAND CITY 1, N. Y.

# ARNCO

# COAT and HAT RACKS

***alumilited aluminum***
**FOR SCHOOLS, HOSPITALS, INSTITUTIONS**

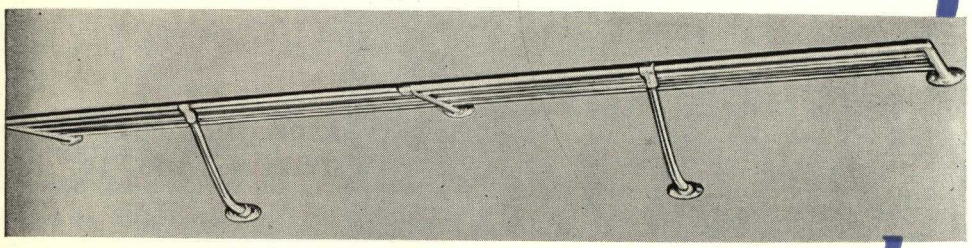

**UTILITY SHELF STYLE #100**

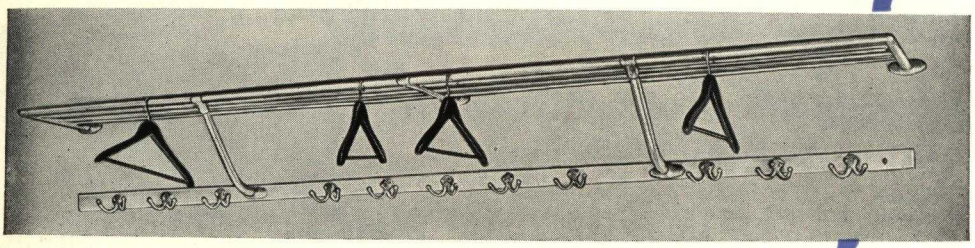

**SINGLE SHELF COAT AND HAT RACK STYLE #101**



**HOOK STRIPS AVAILABLE SEPARATELY**
**(COAT AND HAT HOOKS FURNISHED IF DESIRED)**

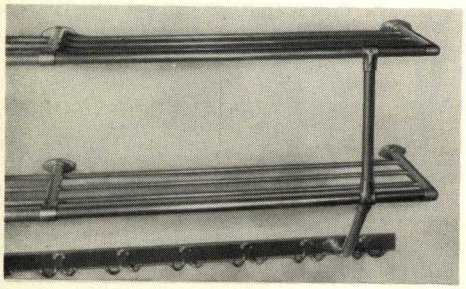

**DOUBLE SHELF COAT AND HAT RACK STYLE #102**

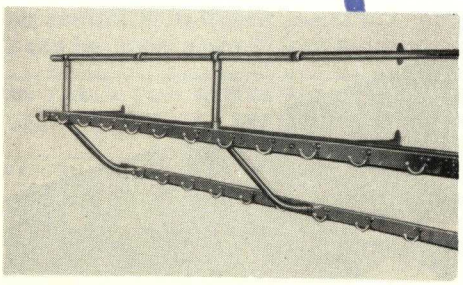

**DOUBLE SHELF COAT AND HAT RACK WITH ADDITIONAL HOOK STRIP STYLE #103**

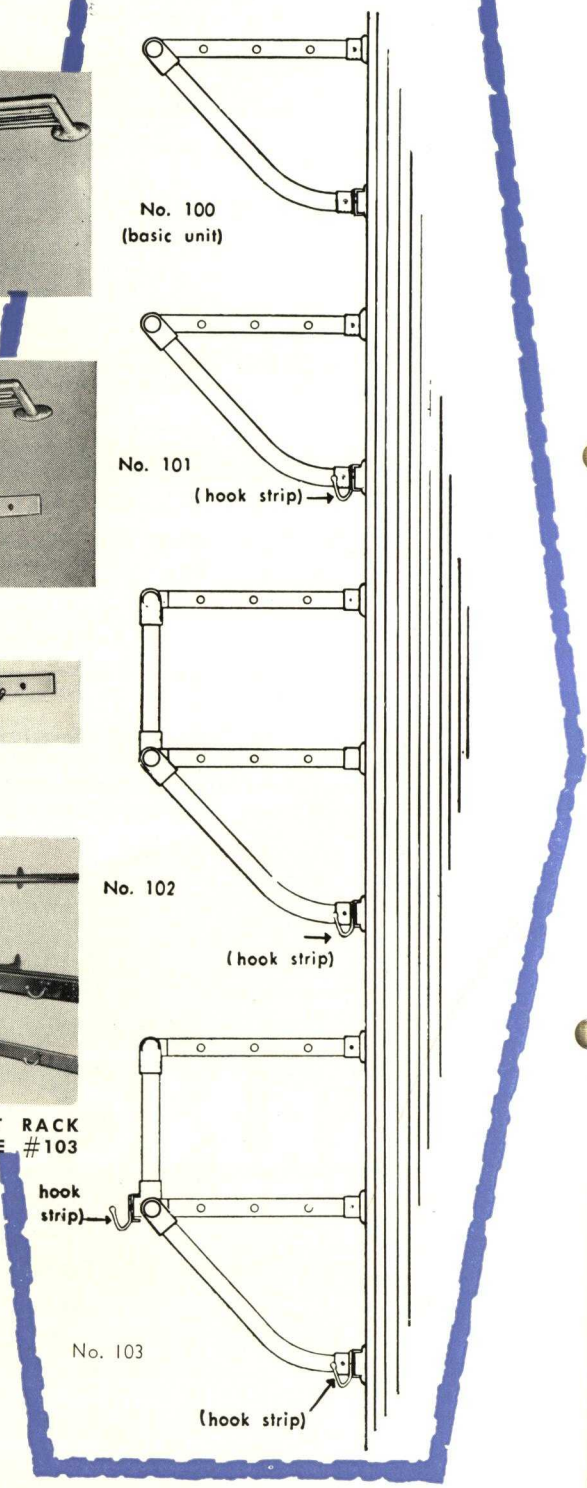


The aluminum shelf, coat and hat racks are smartly designed, not only light, strong and rigid, but include sanitary self ventilating features with beauty. Styles No. 101 and No. 102 are equipped with double-prong hooks 6″ on center. Style No. 103 has single prong hooks 9″ on center staggered. An additional coat rod for Styles No. 100, 101 and 102 can be applied when required.

Shelves up to 6′0″ long furnished with two brackets. Over 6′0″ three or more brackets are supplied. Shelves are shipped assembled. Hooks are applied to strips. All fittings drop forged aluminum. The finish of the entire assembly is alumilited and will not darken or peel. Coat hangers are not furnished.

**ANY DESIRED LENGTH UP TO 16 FEET**

**WRITE FOR CUBICLE CIRCULAR FOR DRESSING AND PATIENT ROOM ENCLOSURES.**

**Shelves on Style No. 102 and No. 103, as well as multiple shelves, are spaced 9″ on center.**

**Where shelves are required to fit into prepared recesses or between walls, allow 1½″ at each end for flanges.**

# CURTAIN CLASSROOM WARDROBES

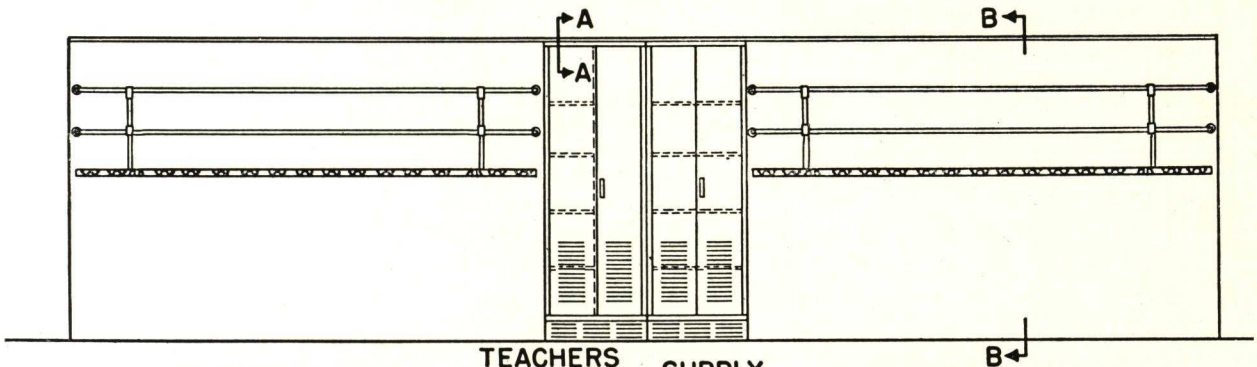


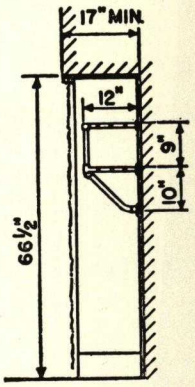


SECT. B-B

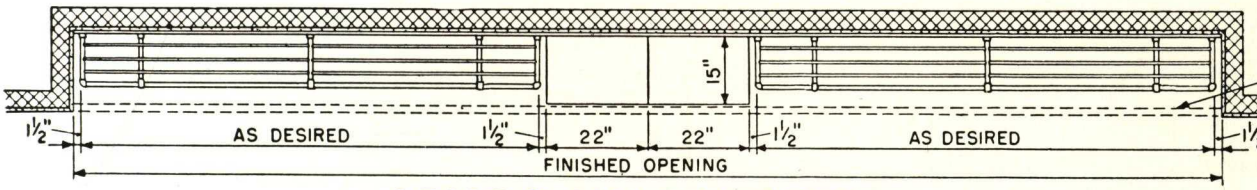


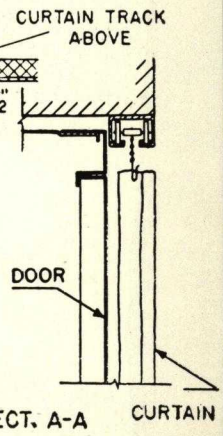


SECT. A-A

## ARNCO WARDROBES

Arnco curtain classroom wardrobes offer economical yet efficient wardrobe equipment. Both arrangement and capacity are entirely flexible. Aluminum shelves and hook strips may be divided as shown, for boys on one side, girls on the other, or continuous with cabinets located at ends. Cabinets may be eliminated if desired. Track and curtains are optional but provide an attractive, flame-proof means of screening clothing. Curtains are 4″ from floor to provide necessary ventilation.

### SPECIFICATIONS

**general** • Wardrobes shall be Arnco curtain classroom wardrobes installed by contractor in recesses as shown on plans. Wardrobes to consist of aluminum coat and hat racks, steel supply cabinet, combination teacher's cabinet, aluminum track with carriers and vinyl coated fiberglas curtains.

**coat and hat racks** • To be constructed of 1″ O.D. x .065 aluminum tubing frame, with forged aluminum fittings, ½″ O.D. x .065 intermediate stringers, and 1½″ x ½″ x ⅛″ extruded aluminum channel hook strip having double-prong hooks applied 6″ on center.

**teacher's closet** • Cabinet to consist of 16 ga. door and frame, with three-point locking device and flat key lock; assembled to a 24 ga. body by means of slotless head bolts. Bottom of doors and base to have louvres; backs to be perforated. Cabinet to have center divider, one compartment having wall and ceiling hooks, the other four adjustable shelves. Available also in wood.

**supply cabinets** • To be as described above except to have one full width compartment with four adjustable shelves. Available also in wood.

**track** • To be specially designed extruded aluminum with raceways for two-wheel carriers.

**curtains** • To be vinyl coated fiberglas, flameproof, mildew proof, color fast, with rustproof grommets approximately 6″ on center starting 2″ from each end to provide overlap at meeting point. Color of curtains to be standard pastel shade as selected.

**carriers** • To consist of specially designed nylon axle and "non-contact" rollers, bead chain and hook; and to operate freely without drag or locking.

**finish** • All aluminum parts to be alumilited to provide permanent finish. Steel cabinets to have baked enamel finish in standard color as selected.

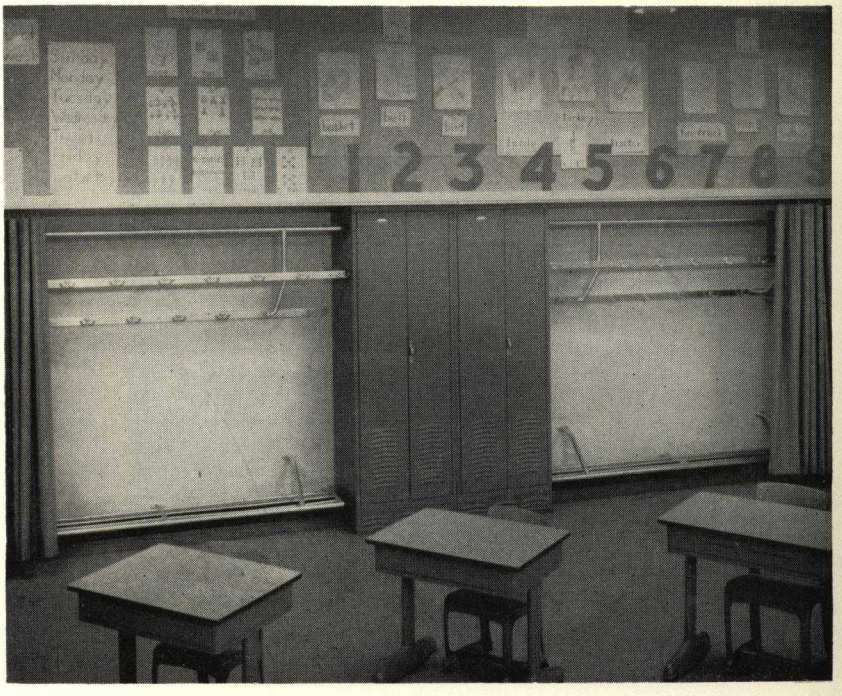

Curtain wardrobe showing optional overshoe rack, inverted style #100 with horizontal braces not more than 2 feet on centers.

# CONSTRUCTION DETAILS OF ALUMINUM COAT & HAT RACKS

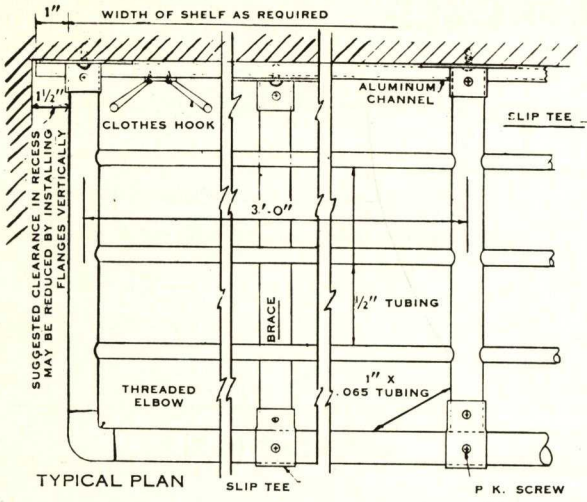


TYPICAL PLAN

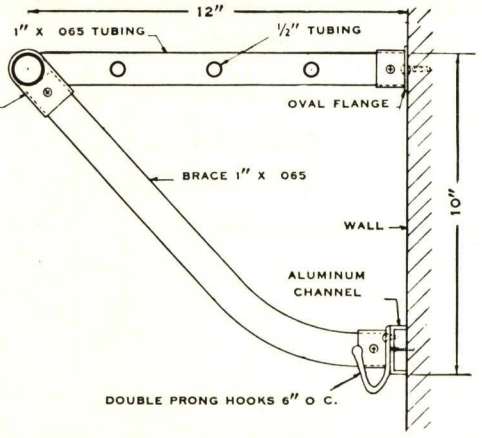


VERTICAL SECTION STYLE #101

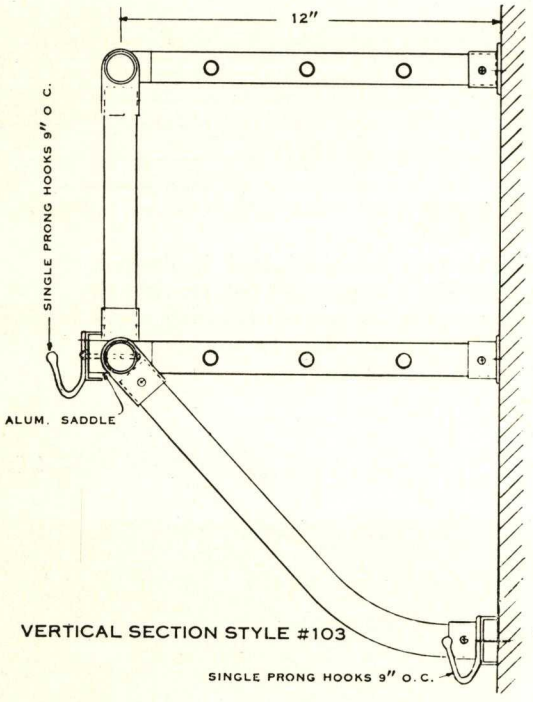


VERTICAL SECTION STYLE #103

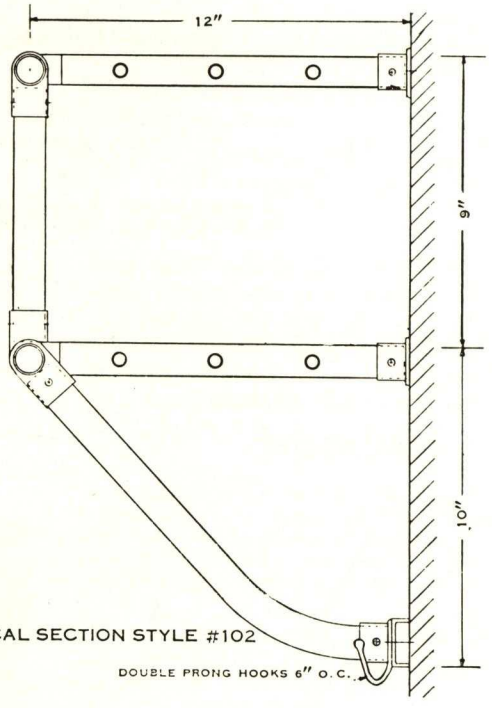


VERTICAL SECTION STYLE #102

## SPECIFICATIONS

Coat and hat racks to be ARNCO Style #..... as manufactured by A. R. Nelson Co., Inc., Long Island City, N. Y. Shelves to be 12" deep and of length as shown on plan. Shelves over 16'-0" in length to be supplied as two (or more) complete units to suit requirement. Shelves to be constructed of 1" O.D. x .065 6063-T832 aluminum tubular frame with three intermediate stringers of ½" x 0.58, reenforced with steel rod. Front corners to be formed by forged 90° aluminum elbows connecting tubing by means of concealed threads and presenting neat, smooth appearance. Wall fastenings to be concealed through forged oval flanges. Intermediate supports for ½" tubing to be 1" tubing spaced not more than 3'-0" on center. Intermediate supports to be connected to front member by means of forged, aluminum slip tees, and secured with oval head Phillips head screws.

Hook strips to be aluminum channel ½" x 1½" x ½" x ⅛" and to have single or double-prong hooks of durable Tenzaloy secured with screws 6" on center (9" staggered where two hook strips occur).

Hook strips used separately (without hat racks) furnished if desired, with coat and hat type hooks of Tenzaloy.

Brackets for all styles to be of same material as frame, to be secured to shelves with forged slip tees, and to hook strip or wall with oval flanges.

Adjustable double prong snap-on hooks to provide additional capacity, or used in place of hook strips.

Vertical supports for multiple shelf styles to be 1" tubing connected to lower shelf and bracket with forged four-way aluminum fitting pesenting continuous vertical line.

Optional coat rod, adaptable to styles #100, #101 and #102, to be 1" O.D. x .065 tubing with closed ends and mounted on forged aluminum fittings to shelf brackets.

Finish to be permanent Alumilite over high polish.

## ERECTION

Installation is simple and accomplished with ordinary tools. Apply wall flanges with 1/4" toggle bolts or rawl plugs and wood screws, depending on wall construction. Insert tubular parts and secure with Philips head screws (furnished) using #31 drill.

Digitized by:

ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

https://archive.org/details/buildingtechnologyheritagelibrary

From the collection of:

Carol J. Dyson, AIA